

RESPONSIVE



WOODLINE

Luxury Vinyl Tile | 1.5mm | 6" x 36" | 60 SQ.FT. PER BOX



RESPONSIVE 

PLANK SIZE: 6" x 36" x 1.5mm

WOODLINE

LVT FLOORING

SIZE: 6" X 36"

THICKNESS: 1.5 MM

COVERAGE: 60 SF / CARTON

INSTALLATION: DRY BACK, GLUE DOWN

WOODLINE

RWL-1501

WOODLINE


RWL-1501

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 

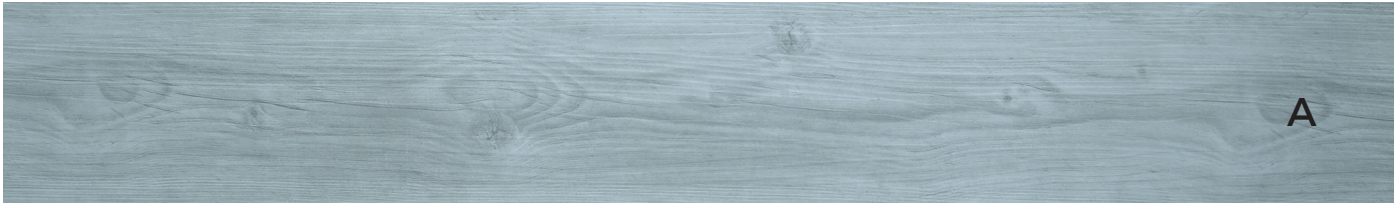

WOODLINE
RWL-1502

WOODLINE

RWL-1502

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 



WOODLINE

RWL-1503

WOODLINE

RWL-1503

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 



WOODLINE

RWL-1504

WOODLINE

RWL-1504

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 



WOODLINE

RWL-1505

WOODLINE





RWL-1505

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 

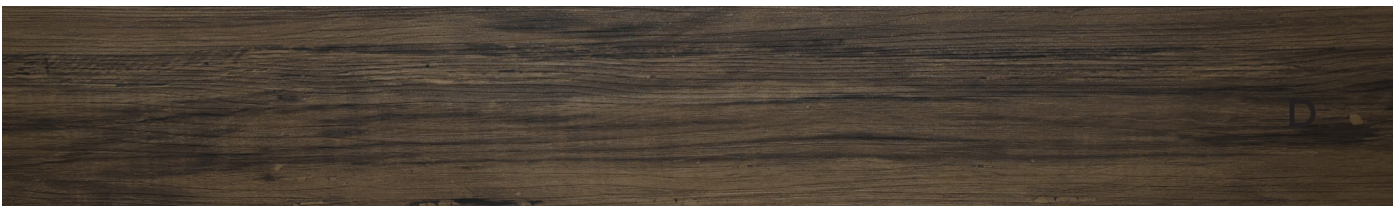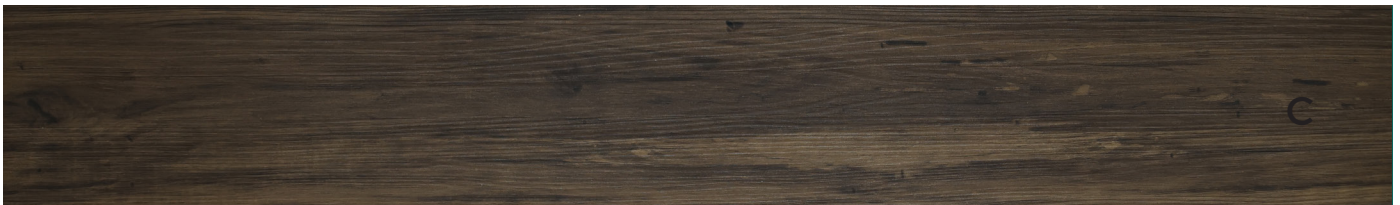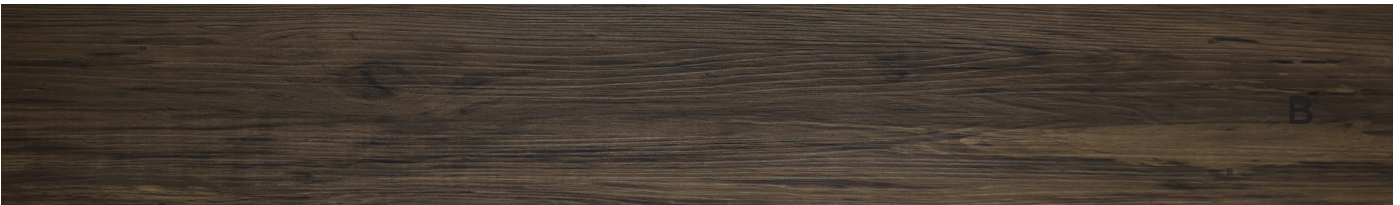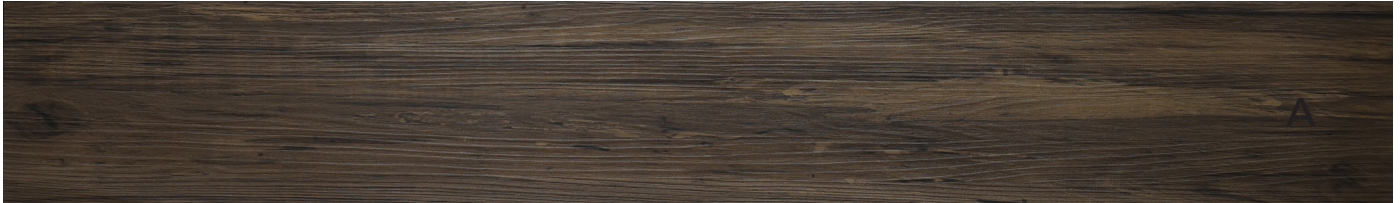

WOODLINE

RWL-1506

WOODLINE


RWL-1506

5 UNIQUE


PATTERN

VARIATIONS

RESPONSIVE 

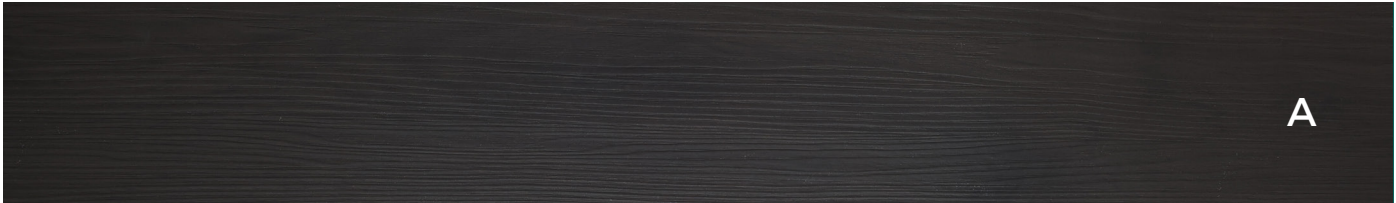


A

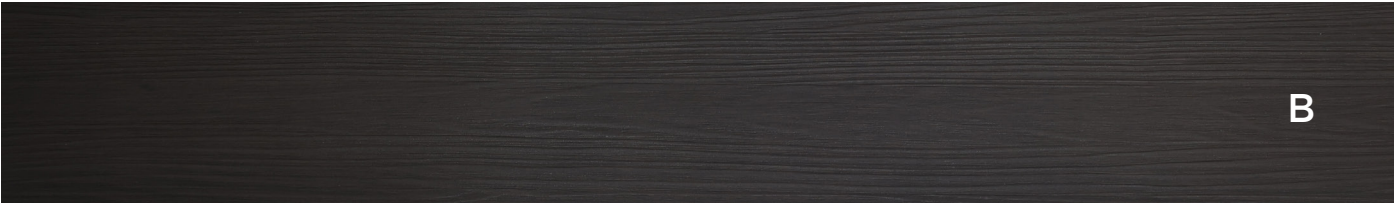


B



C

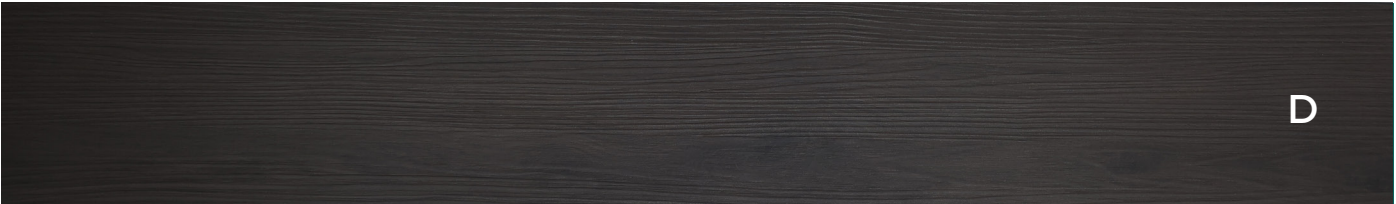

D

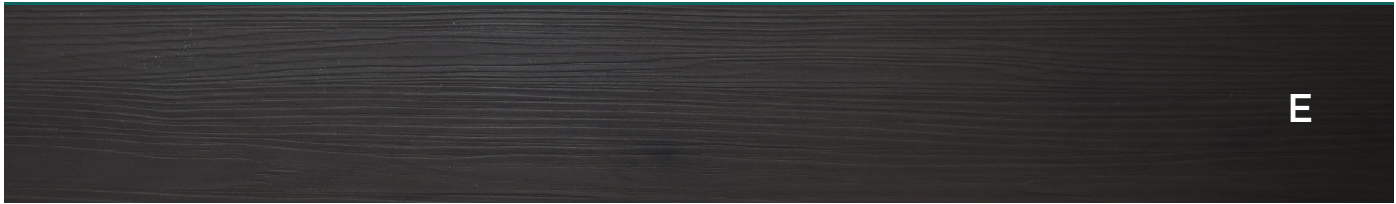

E

WOODLINE

RWL-1507

WOODLINE

RWL-1507

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 



WOODLINE

RWL-1508

WOODLINE

RWL-1508

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 



WOODLINE

RWL-1509

WOODLINE

RWL-1509

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 



WOODLINE

RWL-1510

WOODLINE


RWL-1510

5 UNIQUE


PATTERN

VARIATIONS


RESPONSIVE 

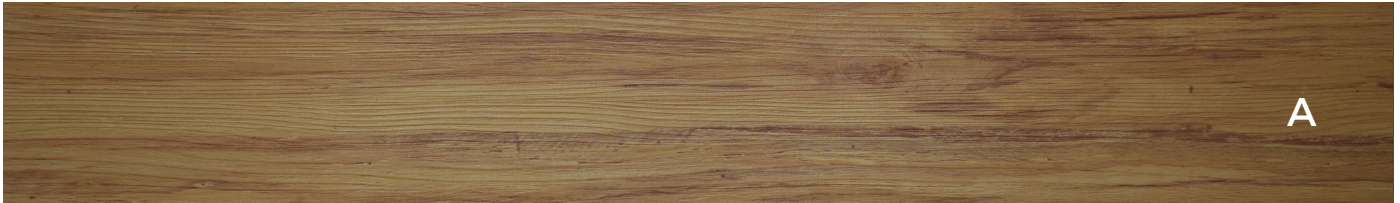

A

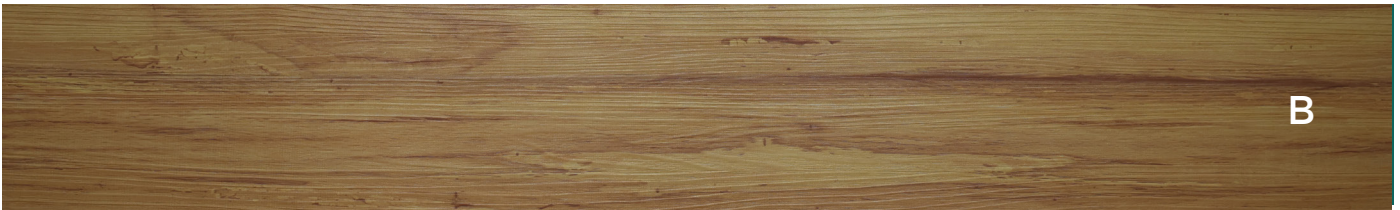

B

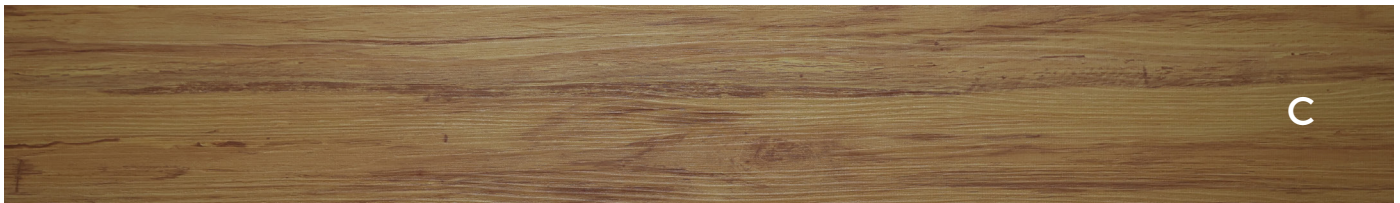

C



D



E

WOODLINE

RWL-1511

WOODLINE



RWL-1511

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 

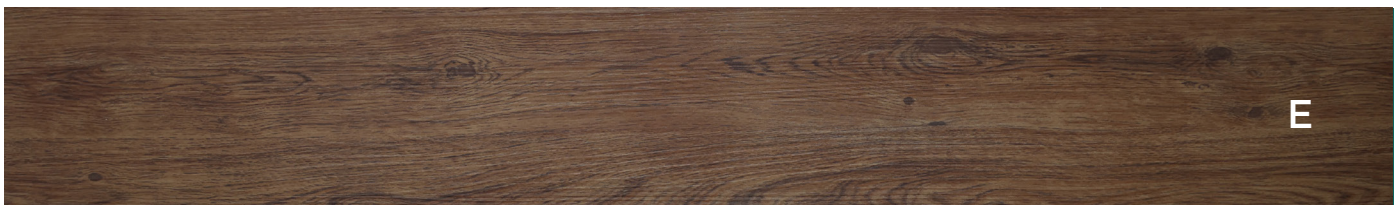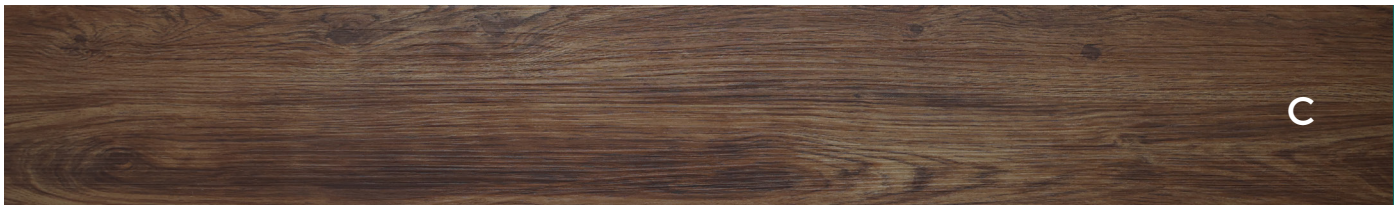

WOODLINE

RWL-1512

WOODLINE


RWL-1512

5 UNIQUE

PATTERN

VARIATIONS

RESPONSIVE 

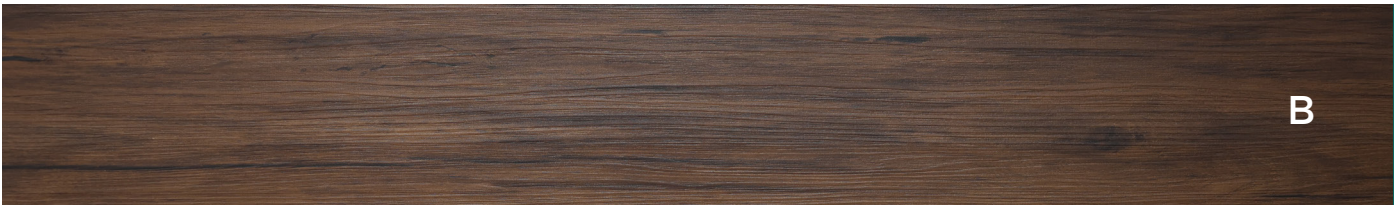

WOODLINE

Luxury Vinyl Planks For Light To Heavy Commercial | PUR Polyurethane Reinforcement | Product Standard: ISO 10582

CERTIFICATION	STANDARD	WOODLINE 1.5
TYPE OF FLOOR COVERING	ISO 10582	LUXURY VINYL TILE
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Commercial : 31

TECHNICAL CHARACTERISTICS	STANDARD	WOODLINE 1.5
TOTAL THICKNESS	EN ISO 2436 (EN 428)	1.5 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.20 MM
SURFACE TREATMENT	UV TREATED	PUR
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	6" X 36" 60.00 Sq.ft / Box

TECHNICAL PERFORMANCES	STANDARD	WOODLINE 1.5
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	Pass
REACTION TO FIRE	EN 13501 – 1	Bfl- S1 glued over A2fl substrate (concrete)
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Pass
FURNITURE LEG	EN 424	No Damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No Damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	Pass
THERMAL RESISTANCE	EN ISO 10456	0.07 M2 K/W
LIGHT FASTNESS	EN ISO 105 – B02	>Grade 6 Pass
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good Resistance Pass
SLIP RESISTANCE	DIN51130 EN 13893	R9 Class DS
ELECTRICAL PROPERTIES	EN 1815 EN 1081	<2 kVon concrete R1 > 10 ¹⁰ Ω



ISO 9001
ISO 14001
ISO 18001

